



- ▶ Made of **HIGH-DENSITY SYNTHETIC RUBBER**
- ▶ For use under today's popular **MLF/LVT/Rigid Core with attached back, Laminate, Sheet Vinyl, Engineered, and Solid Hardwood flooring**

Don't get stuck with a noisy floor

Old Master Products

Whisper Step®

Acoustical Underlayment

Xtreme™ Protection



Noise Guard

Reduces impact and airborne noise in-room and between floors. Reduces up to 10 decibels of in-room noise and an overall improvement between floors of 25%.




Block-Out® Moisture Guard

Prevents spills from getting into subfloor and allows moisture vapor to escape from beneath.




Mold & Mildew Guard

Fresh Dimension® antimicrobial works to inhibit the growth of mold, mildew, and odor-causing bacteria.

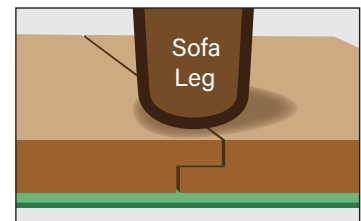

Flooring over Whisper Step®

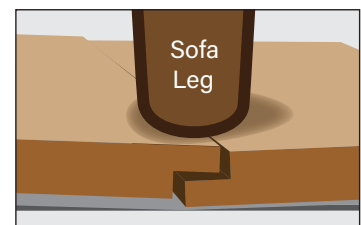

Flooring over lightweight underlayment

Xtreme™ Performance



Comfort

Makes hard-surface flooring more enjoyable.




Support

The class-leading extreme density not only resists compression but will perform for the life of the floor.



Easy Installation

Lays flat and helps mask minor subfloor irregularities; can be used above and below grade.

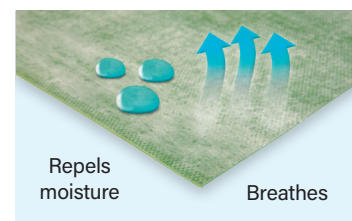

Repels moisture

Breathes

Whisper Step[®]

Acoustical Underlayment

SPECIFICATIONS

Composition:	Made of High-Density Synthetic Rubber	
Density:	62 lbs/ft ³ or 42 oz/yd ²	
Shore A Hardness:	70 ASTM D2240	
IFD @ 25%/65%:	677.2 lbs/5,000+ lbs	
Thickness:	0.056" (1.42 mm)	
Color:	Green	
R-Value:	0.02	
Moisture Barrier:	Block-Out [®] Moisture Guard	
Permeance*:	1.151 ASTM E96	
Water Vapor Emission	0.252 lbs/1000 ft ² /24 hr ASTM E96	
Castor Durability Test:	Passes 25,000 Cycles**	
Product Codes:	BM0042	BM0040
Dimensions:	36" x 33.33'	54" x 44'
Ft ² /Roll:	100	200
Yd ² /Roll:	11.11	22.22
Roll Weight:	29 lbs	58 lbs

ACOUSTICAL PROPERTIES

Impact Insulation Class (IIC)	73
HIIC	88
ΔIIC	22
Sound Transmission Class (STC)	64

PROTECTION

Indoor Air Quality:	Passes California Section 01350 for low VOC emissions
Antimicrobial:	Yes

LIMITED WARRANTY

Please visit OldMasterProducts.com for detailed warranty information.

* Conduct moisture tests in accordance with flooring manufacturer installation guidelines and requirements

** Passes Castor Durability Test for 25,000 cycles when tested under minimum of 3 mm double-glued luxury vinyl plank and minimum 3.2 mm floating-click

Shore A Hardness: ASTM D2240
IFD: ASTM D3574
Permeance: ASTM E96
IIC: ASTM E492-09 / ASTM E989-06
Δ IIC: ASTM E2179-03
STC: ASTM E90 / ASTM E413-10

